


Heat Shrinkable Power Cable Accessories – 1KV

- Light in weight, reliable in operation, and easy to install;
- The product complies with GB11033 standards;
- Suitable for long-term use under temperature conditions ranging from -50°C to 105°C;
- Mainly used for 1KV cable termination and intermediate connection processing;
- Widely used in various fields such as power, petrochemical, metallurgy, railway, port, and construction.

Guide for specification

□RSY - 1 / □ × □

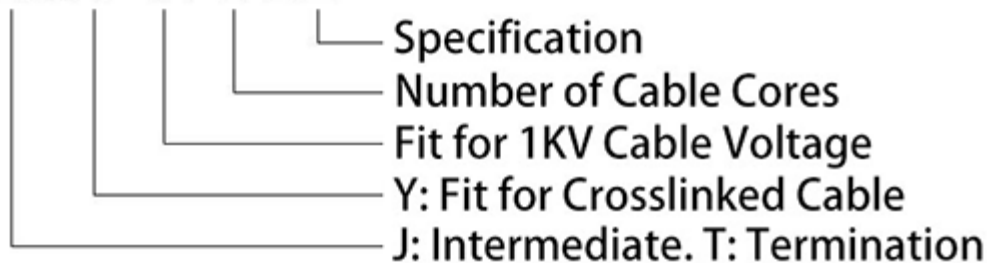

1KV Heat Shrinkable Power Cable Accessories

MODEL	DESCRIPTION	FIT FOR CABLE (mm ²)
TRSY-1/2×0	1KV“XLPE”Heat Shrinkable Termination (2-cores)	10-16
TRSY-1/2×1		25-50
TRSY-1/2×2		70-120
TRSY-1/2×3		150-240
TRSY-1/2×4		300-400
JRSY-1/2×0	1KV “XLPE”Heat Shrinkable Middle Joint (2-cores)	10-16
JRSY-1/2×1		25-50
JRSY-1/2×2		70-120
JRSY-1/2×3		150-240
JRSY-1/2×4		300-400
TRSY-1/3×0	1KV“XLPE”Heat Shrinkable Termination (3-cores)	10-16
TRSY-1/3×1		25-50
TRSY-1/3×2		70-120
TRSY-1/3×3		150-240
TRSY-1/3×4		300-400
JRSY-1/3×0	1KV “XLPE”Heat Shrinkable Middle Joint (4-cores)	10-16
JRSY-1/3×1		25-50
JRSY-1/3×2		70-120
JRSY-1/3×3		150-240
JRSY-1/3×4		300-400
TRSY-1/4×0	1KV“XLPE”Heat Shrinkable Termination (4-cores)	10-16
TRSY-1/4×1		25-50
TRSY-1/4×2		70-120
TRSY-1/4×3		150-240
TRSY-1/4×4		300-400
JRSY-1/4×0	1KV “XLPE”Heat Shrinkable Middle Joint (4-cores)	10-16
JRSY-1/4×1		25-50
JRSY-1/4×2		70-120
JRSY-1/4×3		150-240
JRSY-1/4×4		300-400
TRSY-1/5×0	1KV“XLPE”Heat Shrinkable Termination (5-cores)	10-16
TRSY-1/5×1		25-50
TRSY-1/5×2		70-120
TRSY-1/5×3		150-240
TRSY-1/5×4		300-400
JRSY-1/5×0	1KV “XLPE”Heat Shrinkable Middle Joint (5-cores)	10-16
JRSY-1/5×1		25-50
JRSY-1/5×2		70-120
JRSY-1/5×3		150-240
JRSY-1/5×4		300-400